

**LC-R127R2PG**


**BATTERIEN&AKKUMULATOREN**  
 BdH Dieter Tworowsky  
 Cottbuser Str. 27  
 D-03238 Finsterwalde  
 Tel. 0 35 31/60 47 30  
 Fax 0 35 31/60 47 31  
 Fachhandel für technische Batterien  
 www.battery-service.de

For main and standby power supplies. Expected trickle design life: 6 – 9 years at 20 °C according to Eurobat.

VdS

G193046

**Dimensions (mm)**

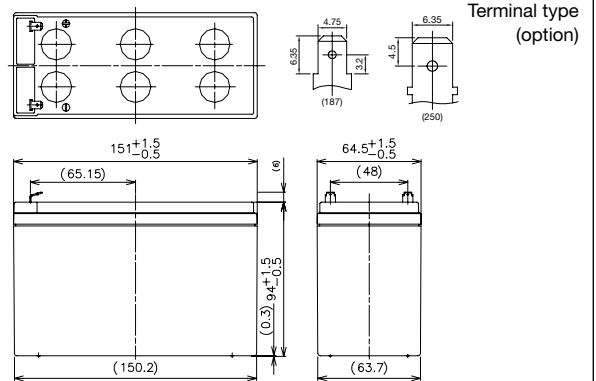

Battery case resin: standard (UL94HB)




Contents indicated (including the recycle marking, etc.) are subject to change without notice.

**Specifications**

Nominal voltage	12 V	
Nominal capacity (20 hour rate)	7.2 Ah	
Dimensions	Length	151 mm
	Width	64.5 mm
	Height	94 mm
	Total Height	100 mm
Approx. mass	2.47 kg	
Terminal	Faston 187 or Faston 250 with hole	

**Duration of discharge vs Discharge current**

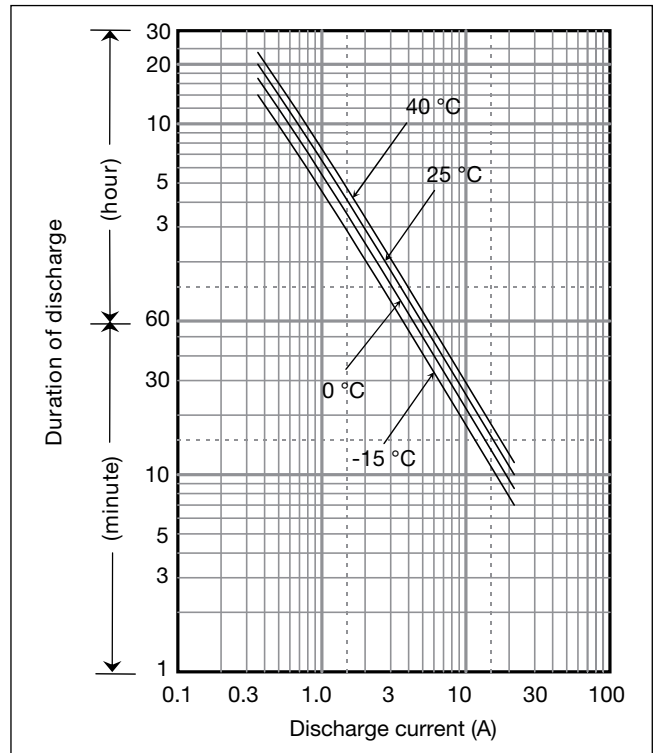

**Characteristics**

Capacity (25 °C)	20 hour rate	7.2 Ah
	10 hour rate	6.8 Ah
	5 hour rate	6.3 Ah
	1 hour rate	4.9 Ah
Internal resistance	Fully charged battery (25 °C)	21 mΩ
Temperature dependency of capacity (20 hour rate)	40 °C	102 %
	25 °C	100 %
	0 °C	85 %
	-15 °C	65 %
Self discharge (25 °C)	After 3 months	91 %
	After 6 months	82 %
	After 12 months	64 %

**Watt Table**

(Wattage/Battery)

Cut-off V	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h	24h
9.6V	433	341	223	170	143	106	75.1	60.1	41.3	32.0	23.8	18.3	15.1	12.1	8.04	4.36	3.64
9.9V	401	320	218	169	140	105	74.7	60.1	40.5	31.7	23.7	18.2	15.0	12.1	8.00	4.34	3.62
10.2V	370	300	213	166	138	104	74.0	58.9	39.7	30.9	23.4	18.0	14.9	12.0	7.92	4.33	3.61
10.5V	329	269	197	154	131	102	72.8	57.7	38.9	29.8	23.1	17.9	14.7	11.8	7.88	4.32	3.60
10.8V	278	237	176	144	128	98	71.6	56.5	37.8	28.4	22.6	17.7	14.4	11.7	7.80	4.30	3.58

**Ampere Table**

(Ampere/Battery)

Cut-off V	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h	24h
9.6V	38.9	30.6	19.9	14.8	12.3	9.1	6.4	5.1	3.50	2.70	2.00	1.53	1.26	1.012	0.670	0.363	0.303
9.9V	36.1	28.7	19.5	14.7	12.1	9.0	6.4	5.1	3.43	2.68	1.99	1.52	1.25	1.008	0.667	0.362	0.302
10.2V	33.3	26.9	19.0	14.4	11.9	8.9	6.3	5.0	3.36	2.61	1.97	1.51	1.24	1.000	0.660	0.361	0.301
10.5V	29.6	24.1	17.6	13.4	11.3	8.7	6.2	4.9	3.29	2.52	1.94	1.50	1.23	0.988	0.657	0.360	0.300
10.8V	25.0	21.3	15.7	12.5	11.0	8.4	6.1	4.8	3.20	2.40	1.90	1.48	1.20	0.972	0.650	0.358	0.298


**Charging Method**

Cycle use	Control voltage: 14.5 - 14.9 V; Initial current: 2.88 A or smaller
Trickle use	Control voltage: 13.6 - 13.8 V; Initial current: 1.08 A or smaller


**Cut off voltage**

Discharge current	0.36 A - 1.44 A	1.44 A - 3.6 A	3.6 A - 7.2 A	7.2 A - 14.4 A	14.4 A - 21.6 A
Cut off voltage (V)	10.5	10.2	9.9	9.3	8.7


**Influence of Temperature on Trickle life**

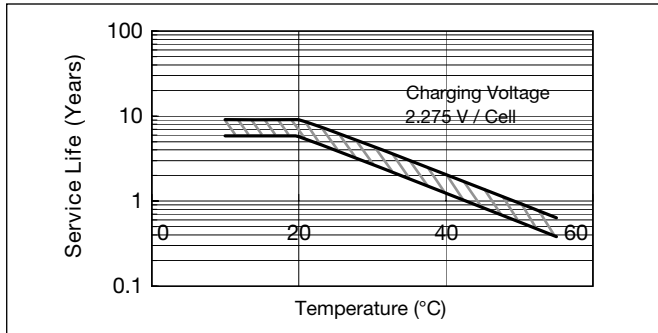


**Cycle life vs Depth of discharge**

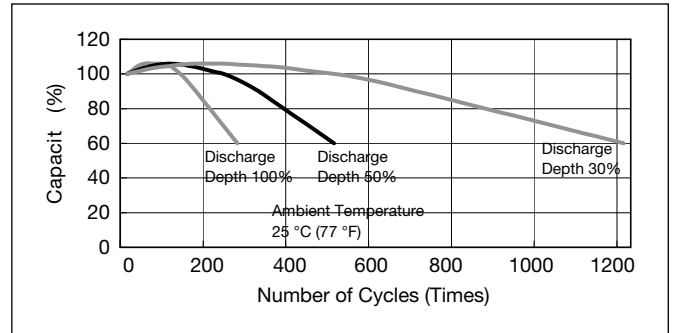


**Residual capacity vs storage period**

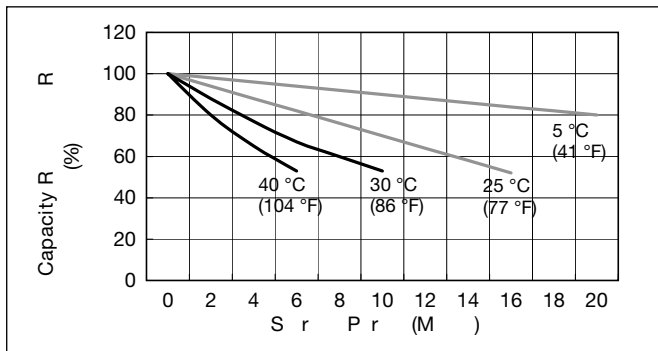


**Discharge capacity by temperature and by discharge current**

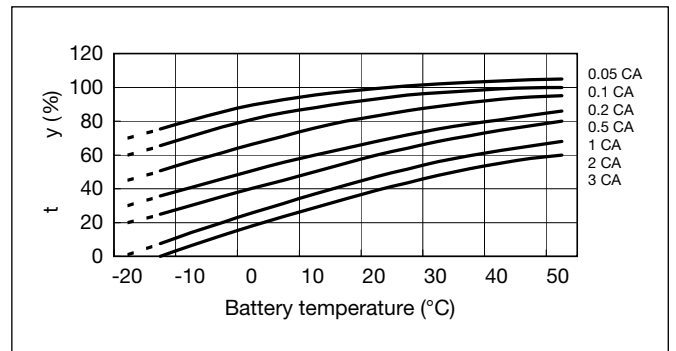

**Constant-voltage and constant-current charge characteristics for Trickle use**

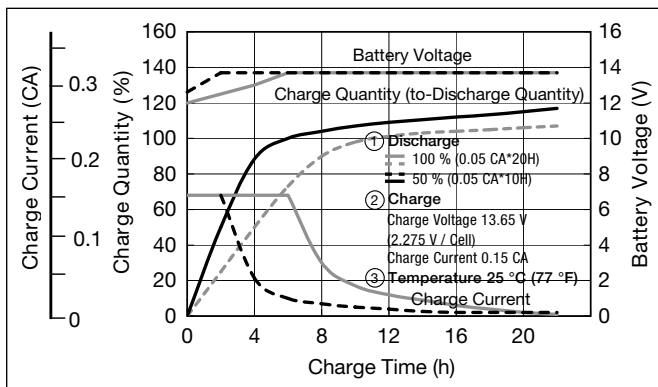

**Constant-voltage and constant-current charge characteristics for Cycle use**

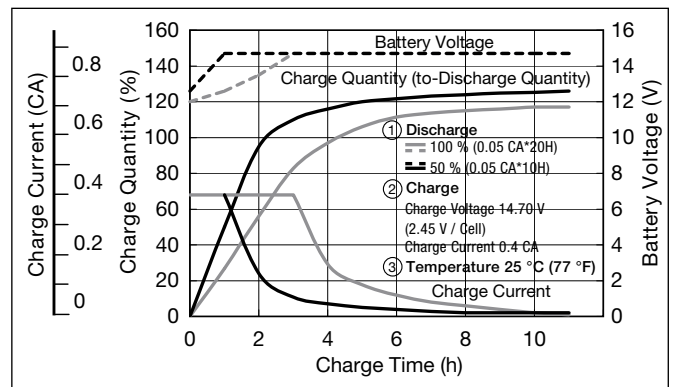

**Discharge characteristics**

